

Stirling Stove Package & Installation

Information

Your Stirling Stove Package Includes

Your quotation includes the supply of the following:

- **Stirling 5kW Wood Burning Stove**
 - 10-year manufacturer's parts warranty (excluding glass, fire bricks and consumable components)
- **Complete Flexible Flue Kit**
 - Up to 10 metres of 316-grade flexible flue liner
 - Terracotta pot-hanging cowl with bird guard mesh
 - Screw-on stove adaptor
 - Register plate
 - Data plate
 - Carbon monoxide alarm
- **Professional Installation**
 - HETAS-approved installation
 - HETAS Certification upon completion

Optional Extras

Where selected, the following items will be listed separately on your invoice:

- Hearth

Preparing for Your Installation

To ensure your installation proceeds smoothly, please ensure the following requirements are met before your scheduled installation date. If you have any concerns about achieving these dimensions, please contact us before your installation date and we'll be happy to advise.


Fireplace Chamber

Your fireplace chamber must have the following **minimum internal dimensions**:

- **Height:** 760mm
- **Width:** 620mm
- **Depth:** 420mm

Hearth Requirements

Where we are **not supplying or installing a new hearth**, please ensure that the existing or separately installed hearth on which your new stove will be positioned meets the minimum dimensions shown below.

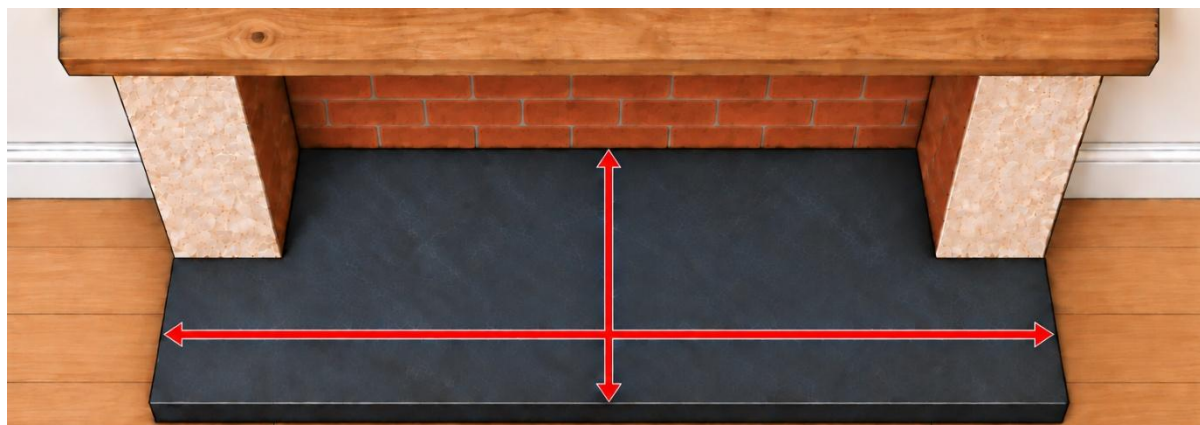

TO WORK OUT THE SIZE OF YOUR HEARTH

HEARTH DEPTH

Measure from the back of the fireplace and add together:

- 1 Required minimum gap behind stove to rear wall = **50mm**
- 2 Plus, depth of chosen stove e.g. Stirling = **359mm**
- 3 Plus, distance from stove door to edge of hearth = **300mm**

Total depth of hearth = 709mm minimum

i Remember, if you position your stove further away from the back wall i.e. more than 50mm, then the calculation should be adjusted accordingly.

HEARTH WIDTH

The hearth width must be **at least 300mm wider** than the width of your chosen stove i.e. **150mm on each side** of the stove.

Hearths are normally much wider than this either matching beams or fire surrounds or inset slightly from the chimney breast edges.

HEARTH HEIGHT

The surface of the hearth must be at least **12mm higher** than that of the finished floor level.

The hearth should be in place and suitable for the stove installation before our installation work begins. If you are unsure whether your hearth meets these requirements, or if you have any concerns about achieving these dimensions, please contact us before your installation date and we'll be happy to advise.

If you have any concerns about achieving these dimensions, please contact us before your installation date and we'll be happy to advise.

Chimney Sweeping

Your chimney must be **professionally swept approximately one week before installation** to ensure it is clean, safe and ready for use.

Helpful Guides

To help you prepare for your installation, please visit our website where you'll find:

- A helpful guide to opening a fireplace.
- Details of some of our local chimney sweeps and tradespeople within the area.

If you have any questions before your installation, please don't hesitate to contact us. We're always happy to help and look forward to installing your new stove.